RELIABLE PERFORMANCE, POLISHED RESULTS

TR FLAIL MOWERS

Diamond's Flail Mowers provide a cut that's manicured and clean. As the toughest and most reliable on the market, you won't find a more precise piece of heavy-duty equipment, anywhere.




SPECIFICATIONS

- CUTS THE THICKEST GRASS & OCCASIONAL LIGHT BRUSH UP TO 2"
- AVAILABLE CUT WIDTH UP TO 22'
- CONFIGURATIONS: SIDE | REAR | TWIN TRIPLE | REAR SWING

IDEAL APPLICATIONS

- ROADSIDE MAINTENANCE
- AIRPORT MOWING
- DITCHING MOWING



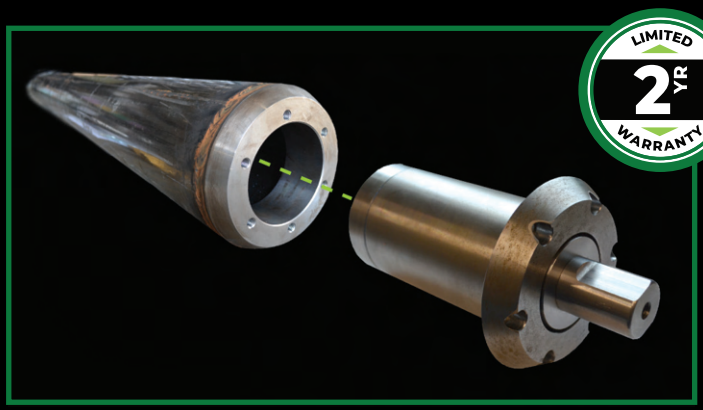

SMART DESIGN, LESS DOWNTIME

Every Diamond Flail Mower comes equipped with:

- Self-cleaning, reversible knives
- Replaceable skid shoes
- Adjustable ground roller height
- Both the discharge flap and protective bonnet shield protect the equipment, the operator and bystanders

INDUSTRY LEADING GROUND ROLLER


- Lubricated in a sealed oil bath, the ground roller requires no daily maintenance or greasing.
- The tapered ground roller edge keeps turns smooth without scuffing, while decreasing wear from road edges.
- Bearings are located inside the ground roller tube for added protection and increased bearing clearance to limit material build-up at the edges of the mower.

AVAILABLE CONFIGURATIONS

MANAGE VEGETATION PRECISELY

SIDE FLAIL

COVERS AREAS UP TO 90”




FEATURES INCLUDE

- Available cut widths: **60" | 75” | 90”**
- Hydrualically driven

REAR FLAIL

COVERS AREAS UP TO 110”




FEATURES INCLUDE

- Available cut widths: **90" | 102” | 110”**
- 540 PTO Driven
- Cat II 3-PT Hitch
- Available in center and offset models

TWIN FLAIL

COVERS AREAS UP TO 16’




FEATURES INCLUDE

- Side Flails available cut widths: **60" | 75” | 90”**
- Rear Flails vailable cut widths: **90" | 102” | 110”**
- Covers large areas up to **16’**
- Hydraulically driven side and 540 PTO rear
- Highly efficient
- Offset option ensures overlap with side flail

REAR SWING FLAIL

COVERS AREAS UP TO 75”



FEATURES INCLUDE


- Available cut widths: **75”**
- Swings out past the rear tire on most tractos
- Mows at 50° down angle and 90° vertical angle
- 540 PTO Driven
- Cat II 3-PT Hitch
- Cuts in hard-to-reach places with side shift and drop
- Able to run in standard or reverse rotation to match cutting conditons

TRADITIONAL TRIPLE FLAIL

COVERS AREAS UP TO 22’

FEATURES INCLUDE

- Side Flails available cut widths: **60" | 75” | 90”**
- Rear vailable cut widths: **110”**
- Over cut width **17.5’ | 19.5’ | 22’**
- 540 RPM PTO driven rear flail
- Independent side mower controls
- Available on Deere 6000E series tractos

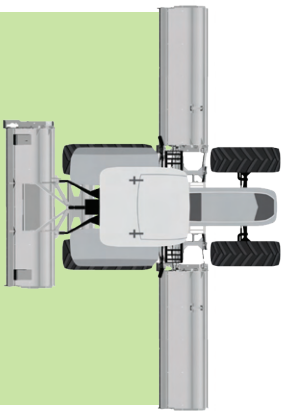

LEARN MORE

TR-FLAIL-MOWERS
R2-V4-09/24/24

CONTACT US **email** hello@diamondmowers.com **web** diamondmowers.com **main office** 605.977.3300